


ISOLE REFRIGERATE

JUMBO ISLAND FREEZER

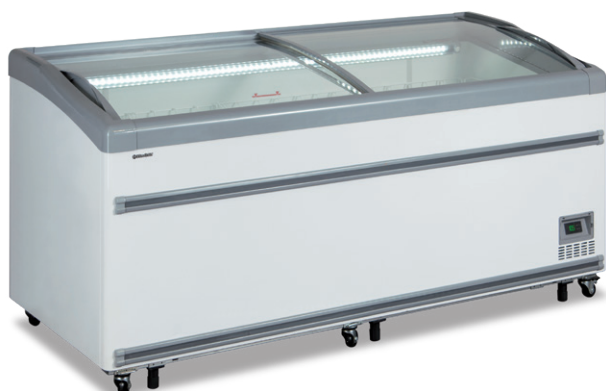

CHFP2PV470S

Isola statica con sbrinamento automatico.
Vetro curvo scorrevole.
Static jumbo island freezer with automatic
defrost. Sliding curved glass.



Isola combinata
Combined island




CHFP2PV700S

Isola statica con sbrinamento automatico.
Vetro curvo scorrevole.
Static jumbo island freezer with automatic
defrost. Sliding curved glass.







Separatori
Separators

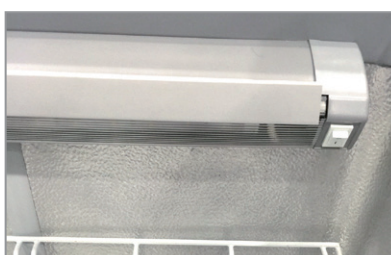

Luci led
Led lighting



Termostato elettronico
Electronic thermostat

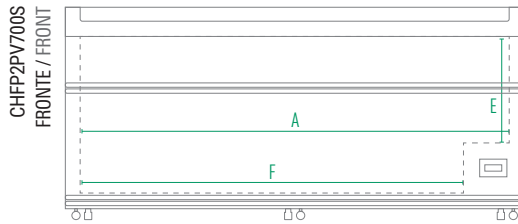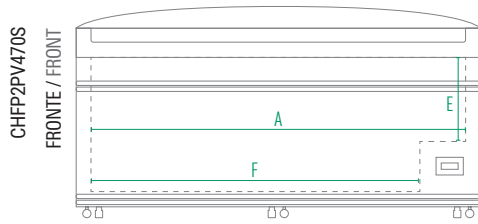

Dimensioni mm / Dimensions mm	CHF2PV470S	CHF2PV700S
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1856 x 870 x 820	2106 x 870 x 925
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1910 x 920 x 946	2160 x 920 x 1050
A - Larghezza / Width	1720	1970
B - Profondità / Depth	730	730
C - Altezza / Height	616	720
E - Altezza Minima / Min. Height	386	490
F - Larghezza Minima / Min. Width	1510	1760
Adesivo Laterale Sinistro / Side Left Sticker	855 x 522,5 / 627	855 x 627 / 731,5
Adesivo Laterale Destro / Side Right Sticker	855 x 250 / 355	855 x 355 / 459,4
Adesivo Frontale / Front Sticker	1917 x 523	2167 x 627

Caratteristiche Tecniche / Technical Features	CHF2PV470S	CHF2PV700S
Temperatura / Temperature Range	-23 °C / -18 °C	-23 °C / -18 °C
Classe Climatica / Climate Class	3	3
Volume Netto-Lordo / Net-Gross Volume	Lt. 471 / 658	Lt. 698 / 912
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 54	dB 54
Smart Link WiFi Controllo remoto / Remote control	Optional	Optional
Spessore isolamento / Insulation thickness	mm 65	mm 65
Sbrinamento / Defrost	Automatico Automatic	Automatico Automatic
Illuminazione / Lighting	Led	Led
Separatori n° / Separators number	5	4
Ruote-Piedi / Castors-Feet	6 Ruote - 6 Piedi 6 Castors - 6 feet	6 Ruote - 6 Piedi 6 Castors - 6 feet
Peso Netto-Lordo / Net Weight	Kg 118 / 140	Kg 146 / 171
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 442	W 516
Consumo Energia / Energy Consumption	Kwh/24H 6,6	Kwh/24H 7,87