


CHF 711 G TC



GAS COMBI OVEN WITH TOUCH CONTROL

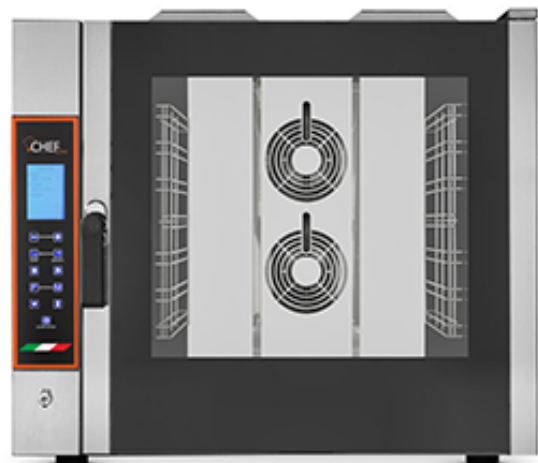

Compact design for a remarkable capacity: 7 1/1 GN pans. Thought for restaurants and midsize delis which need to cook even sophisticated dishes easily and intuitively. Gnocchi au gratin, fillet of pork but also steam cooking and vacuum cooking.



DIMENSIONAL FEATURES			
Oven dimensions (WxDxH mm)	935	978	1068
Oven weight (kg)	119		
Distance between rack rails (mm)	68		

ELECTRICAL FEATURES	
Thermal supply (kW)	13
Frequency (Hz)	50/60
Voltage (Volt)	AC 220/230
N° of motors	2 Bidirectional
Boiler	/
Protection against water	IPX3

PLUS	
USB port to upload and download recipes and HACCP data	
240 storable recipes (40 Eka recipes, 200 user-settable recipes)	
Delayed start function up to 23 hours and 59 minutes	
13 languages for the control panel (Italian-French-English-German-Spanish-Romanian-Polish-Bulgarian-Ukrainian-Russian-Greek-Turkish-Czech)	
Chamber drain for liquids	
Direct chimney for cooking fumes/steam	
Double connection water entry (normal and softened)	
"All glass" door with "satin-finish" (AISI 304) stainless steel side profiles	
Quick cooling of cooking chamber	
Screen-printed glass control panel	
Adjustable door hinges	
Quick fastening of lateral supports	
Stainless steel cooking chamber	
Embedded gasket	
Forced cooling system of inner parts	
Manual+automatic washing set up	
IPX 3	
CB certification	
European Directive/Legislation for gas appliances 2009/142/CE	

FUNCTIONAL FEATURES	
Power	Multigas (tested for natural gas)
Capacity	N° 7 trays/grids 1/1 GN
Type of cooking	Ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 Stainless steel
Temperature	30 ÷ 260°C
Temperature control	Digital probe
Control panel	Touch control - Laterale sx
N° of programs	240
Programmable cooking steps	9
Pre-heating temperature	180°C
Pre-heating function	Programmable
Door	Right side opening with glass extended to cover the condensate collection bowl Ventilated Inspectionable glass

EQUIPMENT			
Cardboard box dimensions with pallet (WxDxH mm)	997	1104	1261
Lateral supports	1 right + 1 left		
Cable	Single-Phase [3G 1,5] - L=1600 mm		
Usb port			
Plug for core probe			
Manual+automatic washing set up			
Removable drip box			
Extractor hood			
Nozzle for LPG			